
PSH series

High Capacity Standard Model Mechanical Force Gauge

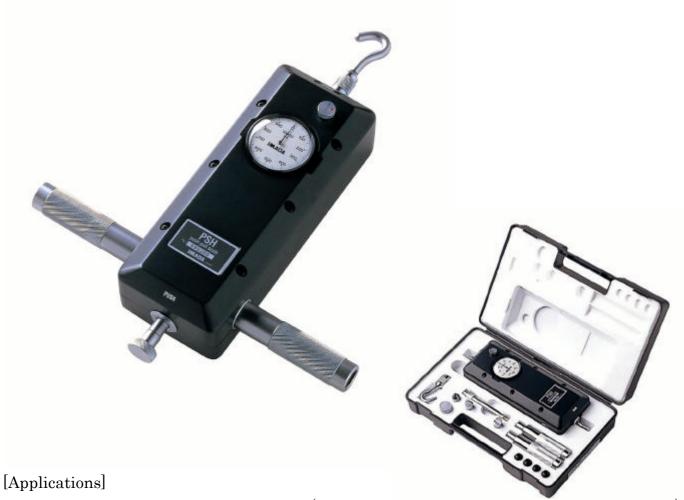

- Strength tests for various materials (tension test, compression test, shearing test, etc.)
- Measuring of attraction/repulsion force of solenoid or magnet.
- Adhesion test of laminated tubes
- * Digital force gauges are suitable for measuring rapid changing force of the destruction test.

[Feature]

- Peak forces are captured by the peak-hold function equipped on all models
- Zero adjustment function for tare weight allows the weight of attachments to be compensated.

[PSH series specification]

Model	PSH		
Stroke	10 mm		
Measuring unit	Refer to the following tables		
Display feature	Real-time Track / Peak-hold mode (Selectable)		
Graduation	100 lines *		
Accuracy	Within +/- 0.1% of F.S		
Operating	0 to+40 degree Celsius		
temperature			
Weight	3.1 kg		
Accessories	6 attachments		
	Handles (2 pcs.)		
	Force gauge mounting plate bolts (4 pcs.)		


^{* 120} lines for 3000N, 300K, 300lb

[PSH series available models]

Model	Capacity	Resolution	Remark
PSH-500N	500N	5N	
PSH -1000N	1000N	10N	
PSH -2000N	2000N	20N	
PSH -3000N *	3000N	25N	
PSH-50K	50kgf	$0.5 \mathrm{kgf}$	Not available for Japanese
PSH-100K	100kgf	1kgf	market due to the Japanese
PSH-200K	200kgf	2kgf	measurement standards law.
PSH-300K *	300 kgf	$2.5 \mathrm{kgf}$	(Available only for overseas
			market)
PSH-200lb	200lb	2lb	Not available for Japanese
PSH-300lb *	300lb	2.5lb	market due to the Japanese
PSH-500lb	500lb	5lb	measurement standards law.
			(Available only for overseas
			market)

^{*} Graduation: 120 lines

[Dimensional drawing]

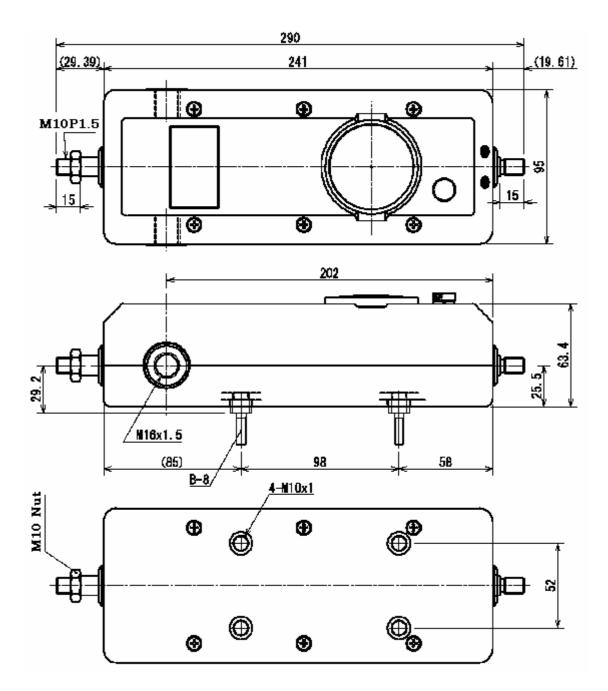

[Precautions]

- Do not apply strong force exceeding its capacity, impact, or torsion stress on the sensing shaft.
- Do not use the gauge under the condition of rapid temperature changes, high temperature, high humidity, near water and dusty places.
- The mounting bolts attached must be used for setting-up the gauge
- Combining with Imada's test stand, more stable measuring becomes possible.
- Keep the gauge in the exclusive carrying case when it is not used.
- All information is subject to change without prior notice.