




Calipers

Dial Caliper SERIES 505

Reading

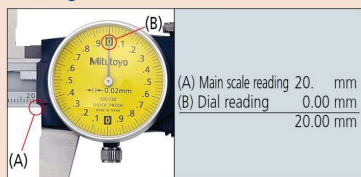

- Newly designed dial movement for ultra-smooth sliding.
- Easy-to-read yellow dial.
- Large finger-rest aids ease-of-use.
- Jaw tips are relieved for easy measurement of thin parts.



SPECIFICATIONS

Metric					
Order No.	Range (mm)	Graduation (mm)	Maximum permissible error (mm)*2		Remarks
505-730			EMPE	SMPE	
505-734	0 - 150	0.02, 2/rev	±0.03	±0.05	—
505-735			±0.03	±0.05	Carbide-tipped jaws for outside measurement
505-731	0 - 200		±0.03	±0.05	Carbide-tipped jaws for outside and inside measurement
505-745	0 - 300	0.01, 1/rev	±0.04	±0.06	—
505-732*1	0 - 150		±0.02	±0.04	
505-733*1	0 - 200		±0.03	±0.05	

Inch					
Order No.	Range (in)	Graduation (in)	Maximum permissible error (in)*2		Remarks
505-740J			EMPE	SMPE	
505-742J*1	0 - 6	0.001, 0.2/rev	±0.001	±0.002	—
505-742-56J			±0.001	±0.002	—
505-742-51J		0.001, 0.1/rev	±0.001	±0.002	—
505-736*1			±0.001	±0.002	Carbide-tipped jaws for outside measurement
505-738*1	0 - 8		±0.001	±0.002	Carbide-tipped jaws for outside and inside measurement
505-744		0.001, 0.2/rev	±0.001	±0.002	Carbide-tipped jaws for outside measurement
505-741J			±0.002	±0.0025	—
505-743J*1		0.001, 0.1/rev	±0.002	±0.0025	—
505-737*1	0 - 12		±0.002	±0.0025	Carbide-tipped jaws for outside measurement
505-739*1		0.001, 0.2/rev	±0.002	±0.0025	Carbide-tipped jaws for outside and inside measurement
505-749			±0.002	±0.0025	—
505-746*1		0.001, 0.1/rev	±0.002	±0.0025	—
505-750	0 - 12	0.001, 0.2/rev	±0.002	±0.0025	Carbide-tipped jaws for outside measurement
505-747*1			±0.002	±0.0025	Carbide-tipped jaws for outside measurement
505-748*1		0.001, 0.1/rev	±0.002	±0.0025	Carbide-tipped jaws for outside and inside measurement

*1 Silver cover type

*2 Partial Surface Contact Error, EMPE and Shift Error, SMPE are terms (notations) used in ISO 13385-1:2019.

DIMENSIONS

