


## POWER TURRET



<b>Model</b>	<b>378-216A</b>
Observation method	Bright-field
No. of objective mounts	5 (1 reference hole and 4 holes with centering adjustment)
View field adjustment	±0.5 mm
Positioning accuracy	$2\sigma = 3 \mu\text{m}$
Durability (life-time)	1 million repositioning operations
Drive method	DC motor
Power supply	<b>AC100 V, 10W</b>
Output interface	RS-232C*1 for external PC control
Cable length	2.9 m*2 (connection of power turret and console box)
Dimensions (WxHxD) and Mass	Turret: 164x65x137 mm, 1.4 kg (378-216: 130x47x186 mm, 1.7 kg), Console box: 108x72x193 mm, 810 g, (378-216: 108x63x176 mm, 810 g)
*1: Optional RS-232C Cable: 12AAA807	
*2: The length of cable connecting the power turret and console box is a safe maximum and	

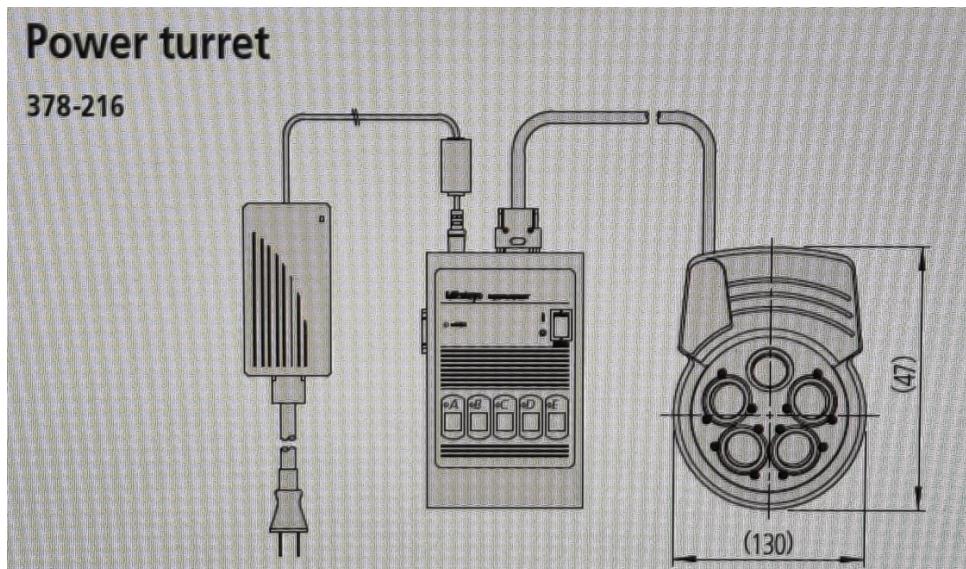

**\* Lenes is optional**

## **Region Suppliers Pte Ltd**

Email: [sales@regionsg.com.sg](mailto:sales@regionsg.com.sg)

Blk 16 Kallang Place #01-02, Kallang Basin Industrial Estate

Singapore 339156

Tel : 6295 2288

[www.regionsg.com.sg](http://www.regionsg.com.sg)