.....

MX-500N / MV-500NII series

Motorized Test Stand



(Photo is MX-500N-E. Force gauge and speed/length meter are sold separately.)

[Applications]

Various material testing up to 500N
 (measuring of tensile strength, compressive strength, shearing strength and etc).

- Analysis of mechanical parts for break point and free fit.

[Features]

- Stable measuring by feed screw features with small step of the travel length.
- Suitable for Imada brand digital and mechanical force gauges.
- Overload protection and force control connecting with digital force gauge (Only for MX series)
- Optional scale unit implements scaling its travel length.

[MX-500N/MV-500NII series models]

Stroke	Scale unit	Speed/Length meter	MX-500N Series	MV-500NII Series	Capacity
Normal			MX-500N	MV-500NII	500N
	Yes		MX-500N-S	MV-500NII-S	500N
		Yes	MX-500N-E	MV-500NII-E	500N
Long stroke			MX-500N-L	MV-500NII-L	200N
	Yes		MX-500N-S-L	MV-500NII-S-L	200N
		Yes	MX-500N-E-L	MV-500NII-E-L	200N

Model number will be followed with below suffixes when you specify speed range.

Suffix	Speed range	Capacity
-WF	40 – 1200 mm/min	200N
-F	20 600 mm/min	500N
	20 – 600 mm/min	200N (Long stroke)
-0	2 00	500N
	2 – 60 mm/min	200N (Long stroke)

[MX-500N/MV-500NII series specifications]

Model	MX-500N	MV-500N		
Capacity	500N (Normal) 250N (Long stroke)			
Stroke	Approx. 285mm (Normal) Approx. 485mm (Long stroke)			
Feeding method	Feed screw with 3mm lead			
Travel speed	10 to 300 mm/min non-step (No specified)			
Table	150 x 100 mm, (Aluminum / Stainless plate cover)			
Force gauge	Imada mechanical / digital force gauge (Except high capacity models)			
Single/Continuous cycle	Yes	Press and keep to continue moving		
Overload protection Force control	Yes *0	Press and keep button for 2 seconds so that this machine keeps moving		
Dimensions	See dimensions			
Wight	Approx. 18kg			
Accessories	Grip mount GF-1 (M6 thread)			


^{*0} Optional cable CB-501 is necessary for connection with force gauge. Some model of force gauge is not compatible with this function.

Factory built only. The customer can not build them after purchasing.

	· -	
Scale unit	Resolution: 0.01mm	
(option *1)	Zero / Origin	
	EN-00	
Length/speed meter	Speed resolution 1mm/min	
(option *2)	Length resolution 0.01mm	
	Zero	
Speed range	See models	

^{*1} Factory built only for MX/MV-500N-S

^{*2} Factory built only for MX/MV-500N-E. See a brochure for EN-00

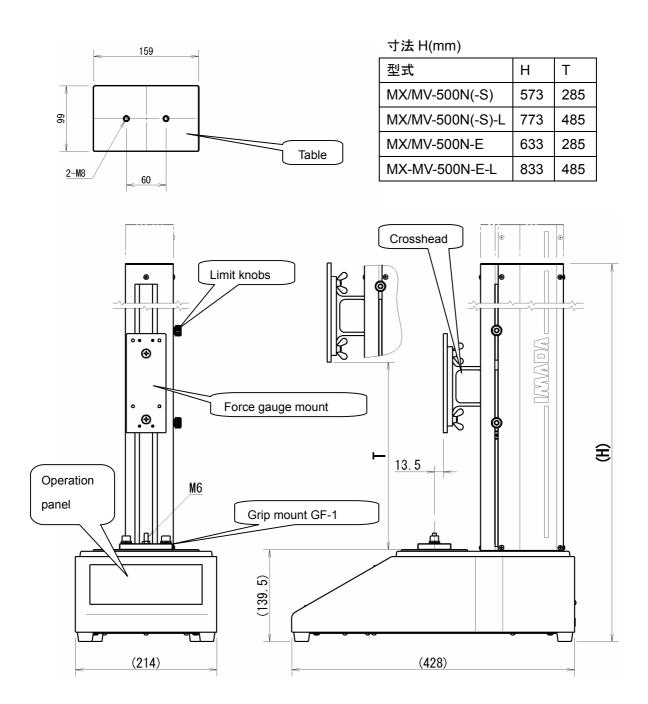

[Note]

- Force gauge is not included with this test stand.
- Various optional attachments are available.
- "Overload protection" does NOT completely avoid every failure of the gauge.
- Please do not apply the load exceeding force of capacity.
- Please avoid rapid temperature change, high humidity, the water, the dust, and the strong shock.
- It may change without a preliminary announcement for improvement etc.