

Rebound-Type Portable Hardness Tester **Pocket Vick** HH-V400



Easy for Anyone, with One Press of a Button

Instantly Test Hardness Anywhere, Anytime

Simply Set and
**Press the
Button!**

The HH-V400 is a rebound-type hardness tester for metals.

Hardness is determined from the ratio of the impact hammer's rebound velocity to its impact velocity.

POINT
1

**Portable,
One-click Device**

POINT
2

**Wide Range of
Test Targets**

POINT
3

**Selectable
Hardness Scale**



For hardness testing of all metals,
including large structures.

Note: Photograph is for illustrative purposes only. In an actual test, be sure to firmly hold the coil holder at the bottom of the detector.

Greatly improved functionality and operability, including color LCD display and enhanced statistical calculation functions

Fully Redesigned Calculation Display

Clearer

Simpler

More User-friendly

NEW

Color LCD

- Backlit
- Eco mode function
- Auto off

Easy-Operation Keys

Easy-to-understand icons

- ⏻ Power on/off
- ⚙ Menu screen display
- ✓ Confirm
- ↶ Back (return to previous screen)
- 📄 Data output
- ◀▶ Change items and values



SPC Connector

- Data output

USB Connector

- Data output, charging

Rechargeable Battery

- Continuous operation for 8 hours

External Output Devices (Optional)

You can enter test data into Excel, Notepad, etc.



IT-020U

For printing out test data.



DP-1VA LOGGER

Test data can be output wirelessly and processed on a PC.



U-WAVE-R
Data reception unit



U-WAVE-T
Data transmission unit

NEW

Key Points of the Calculation Display Unit

- Can automatically save up to 1800 test results
- Can register up to 100 samples
- Includes acceptance judgment, offsetting, and statistical calculation functions
- Convenient external output function



Easy and convenient test setup with easy-to-understand operation key icons

Includes useful functions such as acceptance judgment, offsetting, and statistical calculation

Sample Material Selection

Select the sample material from the material table.
Example) A-1: Iron and steel

Offset Value

Set the offset value.



Acceptance Judgment

Set upper and lower limits.

Statistical Calculation


Set the number of test repetitions (N) and perform statistical calculations.

Test Results

Statistical Calculation Results

Offset Icon


The offset value is reflected in the test results.

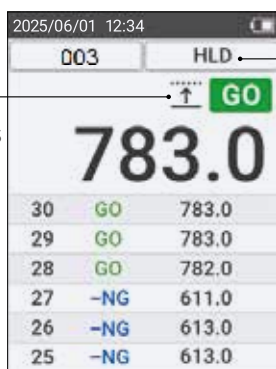

Acceptance Judgment

Test Scale


Example) HLD: Leeb hardness



You can switch between various test scales.

Acceptance Judgment


Ave (average value)
Max (maximum value)
Min (minimum value)
R (range [variance])
SD (standard deviation) are calculated.

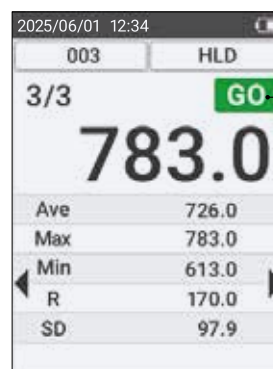


Toggle the test results display between items

Easy display of test results and data management


Test Number Display



Date Display



Sample Display



Register up to 100 samples.

POINT

Key Points of the Product

1. Portable, One-click Device


The HH-V400 is cordless with a rechargeable battery for portability and simple on-site testing. The tester can also be used for objects that cannot be placed onto a tabletop testing machine or that are not easily accessible.



When you want to do on-site measurement...




Simply press the detector against the sample surface and press the push button.
No adjustment work is required when connecting the detector.




(1) Turn the power on.



(2) Select the material.



(3) Press the push button.



(4) The results are displayed.

Material Table Selection

Screen display	Sample material
A-1	Iron and steel
A-2	Alloyed tool-steel
A-3	Gray iron

Screen display	Sample material
A-4	Spherical graphite cast iron
A-5	Stainless steel
A-6	Tool steels for cold-work

Screen display	Sample material
B-1	Brass
B-2	Casting copper-based alloys
B-3	Casting aluminum-based alloys
B-4	Copper-tin-based alloys

The automatic angle-correcting function allows testing in all directions, not just vertically.



Watch a video demonstration of simple omnidirectional measurement.



POINT

Key Points of the Product

2. Wide Range of Test Targets

In addition to general-purpose detectors, we offer a wide range of detectors to suit a variety of test subjects.

Standard Detector

Standard-type general-purpose detector

Detector D

(Standard type)




*Standard accessory for HH-V400

Optional Detector

Automatic recognition of detectors when changing them

Detector DC

(Compact type)




For narrow spaces such as the insides of pipes

Optional Detector

Automatic recognition of detectors when changing them

Detector D + 15


(15 mm longer than standard)



For gaps, grooves, and parts with shallow steps

Detector DL

(For deep grooves)



For narrow surfaces such as grooves between gear teeth

3. Selectable Hardness Scale

Conversion to various hardness scales based on Leeb hardness values

Detector Conversion Ranges

Detector D

Detector DC

Material	HV/Vickers	HB/Brinell	HRC/Rockwell C	HRB/Rockwell B	HS (ASTM)/Shore	VHS (JIS)/Shore	MPa/Tensile strength
Iron and steel	80 to 940	80 to 647	20.0 to 68.0	38.4 to 99.5	30.1 to 99.5	13.2 to 98.0	390 to 1999
Alloyed tool-steel	80 to 898	—	20.4 to 67.1	—	—	—	—
Gray iron	—	93 to 334	—	—	—	—	—
Spherical graphite cast iron	—	131 to 387	—	—	—	—	—
Stainless steel	85 to 802	85 to 655	19.6 to 62.4	46.5 to 101.7	—	—	—
Brass	43 to 196	40 to 173	—	13.5 to 95.3	—	—	499 to 701
Casting copper-based alloys	—	45 to 315	—	—	—	—	—
Casting aluminum-based alloys	—	20 to 159	—	—	—	—	—
Copper-tin-based alloys	—	60 to 290	—	—	—	—	—

Detector D + 15

Material	HV/Vickers	HB/Brinell	HRC/Rockwell C	HRB/Rockwell B	HS (ASTM)/Shore	VHS (JIS)/Shore	MPa/Tensile strength
Iron and steel	80 to 937	80 to 638	19.3 to 67.9	—	33.3 to 99.3	35.3 to 97.8	394 to 1991
Tool steels for cold-work	80 to 935	—	19.8 to 68.2	—	—	—	—

Detector DL

Material	HV/Vickers	HB/Brinell	HRC/Rockwell C	HRB/Rockwell B	HS (ASTM)/Shore	VHS (JIS)/Shore	MPa/Tensile strength
Iron and steel	80 to 950	81 to 638	20.6 to 68.2	37.0 to 99.9	30.6 to 96.8	32.3 to 98.6	390 to 1976

Specifications

Code No.	810-306
Model No.	HH-V400
Testing hardness and range	Leeb hardness: 100.0 to 999.9 HLD
Testing direction	Omnidirectional (with automatic angle-correcting function)
Hardness scale conversion function* (Conversion range varies depending on material.)	Vickers hardness: 43 to 950 HV
	Brinell hardness: 20 to 655 HB
	Rockwell hardness (C-scale): 19.3 to 68.2 HRC
	Rockwell hardness (B-scale): 13.5 to 101.7 HRB
	Shore hardness: 30.1 to 99.5 HS (ASTM) 13.2 to 98.6 HS (JIS)
Sample conditions	Tensile strength: 390 to 1999 MPa
	Minimum thickness: 5 mm
	Minimum mass: 5 kg
	Testing position: At least 5 mm from the edge of the sample and at least 3 mm between test points
Functions	Surface roughness: Ra 2.0 or less
	Automatic angle correction, offset setting, acceptance judgment, hardness scale conversion, data memory storage (1800 points), statistical calculation function, eco mode, auto power-off, backlight
Detector	Type
	Dimensions
	Mass
Display unit	Screen
	Dimensions
	Mass
Power supply	AC adapter, built-in battery (Ni-MH) (Up to 8 hours of operation after 100 minutes of charging)

*HH-V400 guarantees the indicated values based on Leeb hardness.
Converted values are for reference only.

Standard Accessories

Code No.	Product Name	Quantity	Notes
—	Display unit	1	
—	Detector	1	Detector D (standard type)
—	Impact hammer	1	Uses a carbide ball at the tip.
12BAS450	AC adapter	1	Input voltage: AC100 V to 240 V $\pm 10\%$ (50 Hz/60 Hz) Output rating: DC 5.0 V 2.0 A Number of pins: 6
12BAS451	USB 2.0 cable	1	Type A-C
11BAB687	Handle	2	Ball-replacement tool
11AAA857	Small support ring	1	$\phi 14$ mm
05CAA952	Phillips screwdriver	1	For detector replacement
11PAA429	Storage box	1	
99MBG538B	Quick start guide	1	Japanese/English
99MBG537A	Instruction manual	1	English
—	Certificate of inspection	1	
—	Warranty	1	

*Delivered in storage box.

Options

Order No.	Product Name	Specifications
11AAE902	Detector D	$\phi 28 \times 174.5$ mm (tip diameter $\phi 22$ mm)
11AAE903	Detector DC	$\phi 18 \times 86$ mm (tip diameter $\phi 22$ mm)
11AAE904	Detector D +15	$\phi 28 \times 189.5$ mm (tip width 12 mm)
11AAE905	Detector DL	$\phi 28 \times 229$ mm (tip diameter $\phi 4$ mm)
11AAD241	Hardness reference block	880 HLD
11AAD242	Hardness reference block	830 HLD
11AAD243	Hardness reference block	730 HLD
11AAD244	Hardness reference block	630 HLD
11AAD245	Hardness reference block	520 HLD
11AAD240	Hardness test block	Approx. 800 HLD
19BAA248	Support ring	For convex cylindrical surfaces (R10 to 20 mm): for Detectors D and DC
19BAA249	Support ring	For concave cylindrical surfaces (R14 to 20 mm): for Detectors D and DC
19BAA250	Support ring	For convex spherical surfaces (R10 to 27.5 mm): for Detectors D and DC
19BAA251	Support ring	For concave spherical surfaces (R13.5 to 20 mm): for Detectors D and DC
19BAA457	Carbide ball	For Detectors D, DC, and D +15
19BAA458	Replacement ball shaft	For Detector DL

External Output Devices


Code No.	Product Name	Specifications
264-506*	Digimatic Mini-Processor DP-1VA LOGGER	Test data printing
09EAA082	Recording paper	For DP-1VA LOGGER (10 rolls)
264-020	USB Input Tool IT-020U	Test data input unit
06AGL011	Connection cable (1 m)	
06AGL021	Connection cable (2 m)	
02AZD730G	U-WAVE-T	Data transmission unit, IP67 type
02AZD880G	U-WAVE-T	Data transmission unit, buzzer type
02AZD810D	U-WAVE-R	Data reception unit
02AZG011	Connection cable for dedicated use with U-WAVE-T (160 mm)	

* To denote your AC line voltage, add the following suffixes. A for North America, D for Europe, E for the UK, K for Korea, DC for China, and no suffix is required for Japan.


External Dimensions

Unit: mm


Detector D

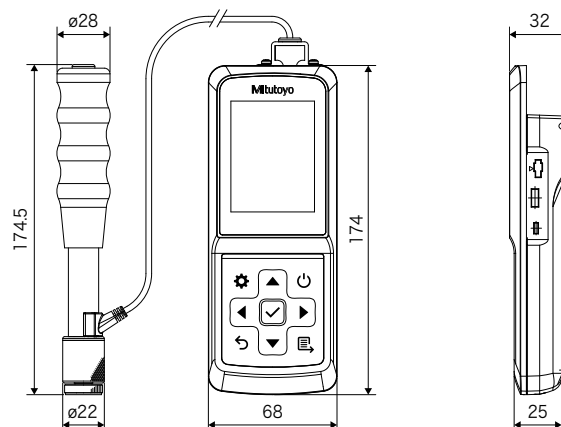


Detector DC

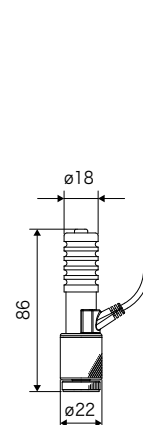


Detector D +15

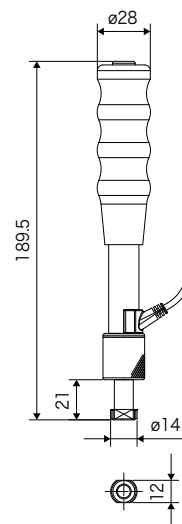

Detector DL

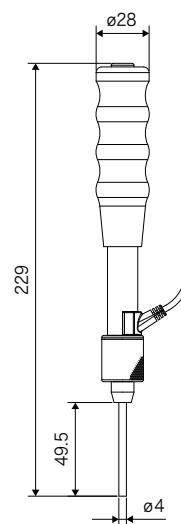

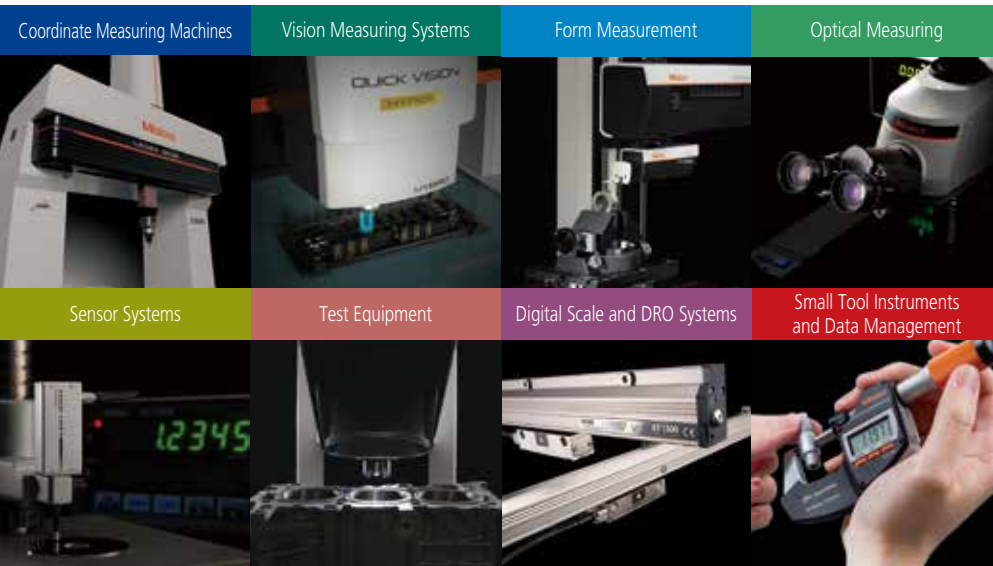

Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Notes on Export Regulations:

Do not commit an act, which could directly or indirectly, violate any law or regulation of Japan, your country or any other international treaty, relating to the export or re-export of any commodities.

Mitutoyo products are designed, manufactured and sold as industrial products that are intended for use at manufacturing sites. Mitutoyo reserves the right to change any or all aspects of any product specification, including prices, designs and service content, without notice.

Our product names, service names and logomarks used on this brochure are trademarks of Mitutoyo Corporation in Japan and other countries. Other product names and service names etc. may be trademarks or registered trademarks of their respective companies. All product information contained in this brochure is current as of August 2025.

Mitutoyo

Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N

24 Kallang Avenue, Mitutoyo Building, Singapore 339415

Tel: (65) 6294 2211 Fax: (65) 6299 6666

E-mail: mapsg@mitutoyo.com.sg



www.mitutoyo.com.sg | www.mitutoyo.com.my
www.mitutoyo.co.th | www.mitutoyo.co.id
www.mitutoyo.com.vn | www.mitutoyo.com.ph

Mitutoyo (Malaysia) Sdn. Bhd.

Mah Sing Integrated Industrial Park,
 4, Jalan Utarid U5/14, Section U5,
 40150 Shah Alam, Selangor, Malaysia
 Tel: (60) 3-7845 9318
 Fax: (60) 3-7845 9346
 E-mail: mmsb@mitutoyo.com.my

Penang Branch

Tel: (60) 4-641 1998
 Fax: (60) 4-641 2998

Johor Branch

Tel: (60) 7-352 1626
 Fax: (60) 7-352 1628

Mitutoyo (Thailand) Co., Ltd.

2327, Onnut Road, Kwaeng Onnut,
 Khet Suanluang,
 Bangkok 10250, Thailand
 Tel: (66) 2080 3500
 Fax: (66) 2521 6136
 E-mail: office@mitutoyo.co.th

Chonburi Branch

Tel: (66) 2080 3563
 Fax: (66) 3834 5788

ACC Branch

Tel: (66) 2080 3576

PT. Mitutoyo Indonesia

Jalan Sriwijaya No.26
 Desa cibatu
 Kec. Cikarang Selatan
 Kab. Bekasi 17530, Indonesia
 Tel: (62) 21-2962 8600
 Fax: (62) 21-2962 8604
 E-mail: ptmi@mitutoyo.co.id

Batam Branch

Tel: (62) 778 488 8000

Mitutoyo Vietnam Co., Ltd.

1st & 2nd Floor, MHD1 Building,
 No. 60 Hoang Quoc Viet Road,
 Nghia Do Ward,
 Hanoi, Vietnam
 Tel: (84) 24-3768 8963
 Fax: (84) 24-3768 8960
 E-mail: mvc@mitutoyo.com.vn

Ho Chi Minh City Branch

Tel: (84) 28-3840 3489

Hai Phong Branch

Tel: (84)22-5398 9909

Mitutoyo Philippines, Inc.

Unit 1B & 2B LTI,
 Administration Building 1,
 Annex 1, North Main Avenue,
 Laguna Technopark, Biñan,
 Laguna 4024, Philippines
 Tel: (63) 49-544 0272
 Fax: (63) 49-544 0272
 E-mail: mpi@mitutoyo.com.ph